




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : G11B 17/22, 33/08, 17/30	A1	(11) International Publication Number: WO 00/54272 (43) International Publication Date: 14 September 2000 (14.09.00)
(21) International Application Number: PCT/EP00/02187 (22) International Filing Date: 10 March 2000 (10.03.00) (30) Priority Data: 199 10 673.8 11 March 1999 (11.03.99) DE (71) Applicant (for all designated States except US): KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL). (71) Applicant (for DE only): PHILIPS CORPORATE INTELLECTUAL PROPERTY GMBH [DE/DE]; Habsburgerallee 11, D-52066 Aachen (DE). (72) Inventors; and (75) Inventors/Applicants (for US only): KUNZE, Norbert [DE/DE]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). MÜLLER, Stefan [DE/DE]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). (74) Agent: VOLMER, Georg; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).		(81) Designated States: CN, JP, KR, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i>

(54) Title: CHANGER DEVICE FOR DISC-SHAPED DATA CARRIERS

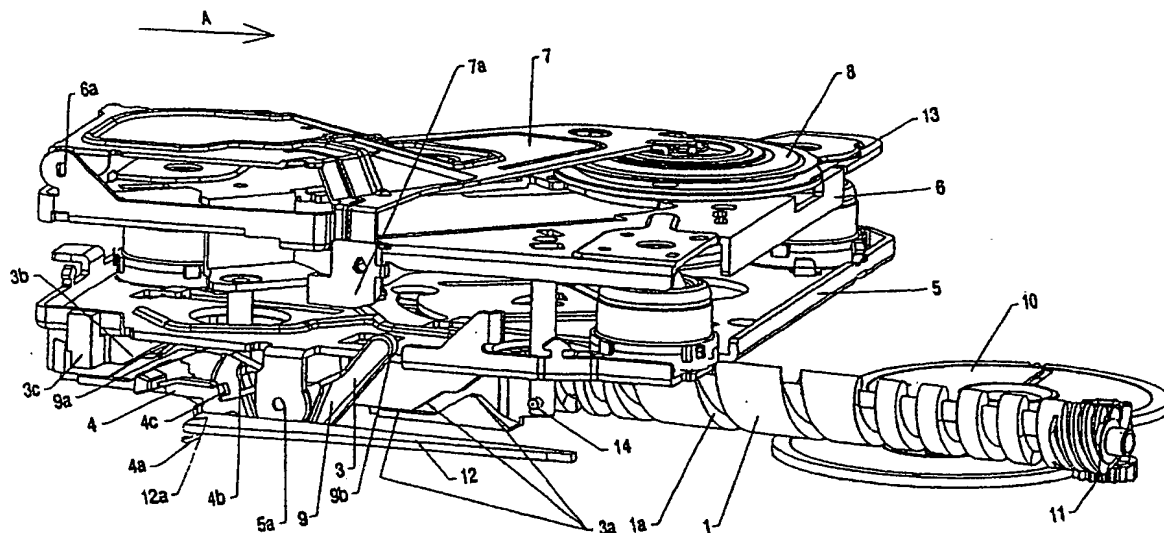

(57) Abstract

The invention relates to a device for playing and storing several disc-shaped data carriers to be operated alternately, in particular CDs, CD-ROMs, and DVDs, with a playback unit designed for playing the data carrier and comprising a base plate (5) and a frame (6) which are coupled to one another by means of springs and/or dampers, and comprising a turntable (13) arranged on the frame (6) and designed for accommodating the data carrier and a pressure device for pressing the data carrier onto the turntable (13), while a stacking unit is provided for the intermediate storage of several data carriers, and a loading device is provided for the bidirectional transport of the data carrier between the stacking unit and the playback unit as well as for moving the data carrier into and out of the device. The playback unit is displaceable by means of a worm gear (1) and can be locked in several positions.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

Changer device for disc-shaped data carriers.

The invention relates to a device for playing and storing several disc-shaped data carriers to be operated alternately, in particular CDs, CD-ROMs, and DVDs, with a playback unit designed for playing the data carrier and comprising a base plate and a frame which are coupled to one another by means of springs and/or dampers, and comprising a turntable arranged on the frame and designed for accommodating the data carrier and a pressure device for pressing the data carrier onto the turntable, while a stacking unit is provided for the intermediate storage of several data carriers, and a loading device is provided for the bidirectional transport of the data carrier between the stacking unit and the playback unit as well as for moving the data carrier into and out of the device.

Usually, a stacking unit for accommodating several data carriers, a playback unit on which one of the data carriers can be positioned each time for the purpose of reading or writing of the data, and a loading device for the transport of the data carriers are present in such a device. Given the requirement of a compact construction of the device, the present state of the art is such that the stacking unit stores the individual data carriers one above the other, that the reading or writing operation takes place in one and the same region which lies within the transport range of the data carrier during the selection of the data carrier to be read or written, and that accordingly the playback unit is displaced relative to the stacking unit before the selection of the data carrier to be read or written so as to clear the space for the stacking movement. The present state of the art is furthermore such that the playback unit consists of a base plate and a frame connected thereto by means of springs and dampers, which frame comprises the devices for driving the read/write device and the means for rotating and pressing the data carrier on a turntable. It is also known that the frame is locked with respect to the base plate while the data carrier is laid on or taken from the playback unit by a loading device in a CD player, so that the transfer of the data carrier to the playback unit or to the charging unit (in the reverse operation) is made easier.

It is an object of the present invention to provide a drive for the transport of the playback unit which is inexpensive and simple, and which nevertheless renders possible a fast and accurate positioning and locking of the playback unit in several positions in the device.

According to the invention, this object is achieved in a device for playing and storing several disc-shaped data carriers to be operated alternately, in particular CDs, CD-ROMs, and DVDs, with a playback unit designed for playing the data carrier and comprising a base plate and a frame which are coupled to one another by means of springs and/or dampers, and comprising a turntable designed for accommodating the data carrier and a pressure device for pressing the data carrier onto the turntable, while a stacking unit is provided for the intermediate storage of several data carriers, and a loading device is provided for the bidirectional transport of the data carrier between the stacking unit and the playback unit as well as for moving the data carrier into and out of the device, in that the playback unit is movable by means of a worm gear and can be locked in several positions.

The advantage of the use of the worm gear lies in the exact positioning possibility which can be achieved by means of the slope of the worm gear. In addition, the worm gear is mechanically robust, provides a compact construction, and is capable of transporting several slides simultaneously.

In an embodiment of the invention, the worm gear comprises a continuous thread with several ranges having different thread slopes, suitable for varying the speed of the translatory movements in dependence on the position of the playback unit at a constant worm gear rotation speed, or even stopping said movement completely.

This offers the advantage that the worm gear can always rotate at the same speed, so that an expensive drive providing a variable rotation speed can be dispensed with.

In a further embodiment of the invention, a control slide is displaced by the thread of the worm gear, which slide can be locked to the playback unit, so that the control slide and the playback unit are jointly moved by the thread of the worm gear, and the playback unit itself is retained by interlocking shapes in the device when the locking between the control slide and the playback unit is lifted; while the control slide still remains movable on its own and can accordingly be displaced relative to the playback unit, performing switching functions inside the playback unit.

It is possible with this advantageous embodiment for one control slide to suffice both for moving the playback unit and for carrying out further switching functions in the device.

In a further embodiment of the device, the device is provided with a retaining catch for the control slide and the playback unit which is constructed such that it alternately inhibits and releases the movement of the control slide relative to the playback unit or the movement possibility of the playback unit relative to the entire device.

It is safeguarded thereby that the playback unit can only move if the control slide is locked thereto. When the control slide is carrying out switching movements while it is not connected to the playback unit, an undesirable movement of the playback unit is excluded.

It is furthermore provided that the control slide has contours which control the pressure device for the data carrier in the case of a movement relative to the playback unit and which inhibit the movement possibility between the base plate and the frame plate, which is limited by the spring-damper system only, and reduce the distance between the base plate and the frame.

This renders it possible to actuate also the functions of the pressure device by means of the control slide without any further drive such as, for example, a servo drive being necessary for this.

In a further embodiment of the invention, the control slide has a contour which controls the retaining catch in the case of a movement relative to the playback unit.

The control slide can thus advantageously also control the retaining catch, so that a further drive can be dispensed with.

It is in addition provided that the device is provided with a switch for electronic position detection which is integrated in the drive mechanism of the worm gear, or is controlled by the worm gear, or is controlled by the displacement of the control slide.

This offers the advantage that the instantaneous position of the worm gear or the control slide can be made available to the electronic circuits in the device according to the invention by means of an electrical signal.

It is in addition provided that a positioning mechanism is fitted with the features according to the invention as mentioned above.

An embodiment of the invention will be explained in more detail below with reference to the drawings, in which:

Fig. 1 is a perspective view of a drive unit;

Fig. 2 is a further perspective view of the drive unit;

Fig. 3 is a perspective view of a base plate in a playback unit; and

Fig. 4 is a perspective view from below of the drive.

The drive unit shown in Fig. 1 comprises a control slide 3, a worm gear 1 with a thread 1a having different slopes in different regions, and a catch 4 in a position in which the drive unit is locked against a locking contour 12 which forms part of the device, while a CD (not shown) is pressed onto the turntable 13 by the pressure device. The locking of the playback unit to the locking contour 12 is achieved in the direction of an arrow A by means of

a tongue 4a of the catch 4 which lies in front of the edge 12a. The catch 4 is rotatably journaled in point 5a of the base plate. A locking in the direction opposed to the arrow A is achieved by a fixed detent (not shown) in the device. The pressure device for the CD is rotated about a point 6a of the frame in the direction of the turntable 13 by a spring (not shown), thus clamping the CD between the turntable 13 and the pressure disc 8. An operational track 9a of the opening lever 9 for this purpose is not in contact with the slope 3b of the control slide 3, so that the lifting arm 9b of the opening lever 9 does not bear on the lifting block 7a of the pressure bracket. In addition, the control slide 3 has been moved into its extreme left-hand position in Fig. 1, and its locking contour 3a has released the locking studs 14, so that the frame 6 is freely movable.

In Fig. 2, the drive unit is locked to a locking contour 12 which forms part of the device, while a CD (not shown) is not pressed home onto the turntable by the pressure device. For this purpose, the control slide has been displaced some distance in the direction of the arrow A through rotation of the worm gear 1, so that the slope 3b of the control slide 3 was moved against the operational track 9a of the opening lever 9, with the result that the latter lifts the pressure bracket 7 through contact of the lifting arm 9b with the lifting block 7a. The locking studs 14 fastened to the frame 6 were moved along the locking contour 3a of the control slide 3 thereby, so that the frame 6 is pulled in downward direction in the picture, and the free movement of the frame 6 is prevented, which safeguards a sufficiently accurate positioning of the frame 6 for the purpose of laying a CD on the turntable. The mutually opposed movements of the frame 6 and the pressure disc 8 lead to a sufficiently wide gap between the turntable 13 and the pressure disc 8 for the CD to be reliably moved to above the turntable 13.

A further setting of the drive unit is shown in Fig. 3, where the catch 4 is in a position in which the catch 4 locks the control slide 3 to the base plate 5, while the drive unit is not locked in the device. To achieve this, the control slide 3 was moved some distance further in the direction of the arrow A, so that the carrier 3c of the slide was moved against the locking hook 4b of the catch 4, which was accordingly rotated in clockwise direction in the picture. This causes the rear stop 4c of the catch 4 to pivot behind the locking hook 4b, while the tongue 4a of the catch 4 is lifted from the edge 12a of the locking contour 12, so that the locking of the drive unit in the device in the direction of the arrow A is eliminated, which has the result that a further movement of the control slide in the direction of the arrow A will take along the playback unit, and the tongue 4a of the catch 4 will come to lie on the surface of the locking contour 12. The carrier 3c of the control slide now lies in a window formed by the

locking hook 4b and the rear stop 4c of the catch. This has the result that the playback unit will follow the movement of the control slide in both directions until the tongue 4a of the catch 4 slides off the edge 12a of the locking contour 12 again in the case of a displacement of the control slide opposed to the direction of the arrow A.

5 The displacement of the playback unit will now be described. This operation is achieved by means of the rotatable worm gear 1 in that this gear 1 has thread turns 1a into which a tappet 2 serving for the transport of the playback unit engages, which tappet forms part of a control slide 3 which is fixedly locked to the playback unit by a catch 4 or can alternatively be uncoupled therefrom in a defined position of the playback unit in the device,
10 in which case the catch 4 provides a locking of the playback unit in this position in the device, so that the playback unit will remain in place in spite of the worm gear 1 rotating, and the control slide 3 can be displaced further, so that the locking between the base plate 5 and the frame 6 as well as the adjustment of the pressure device comprising the pressure bracket 7, pressure disc 8, and opening lever 9 is controlled. The thread turns 1a of the worm gear have
15 been divided here into several regions having different slopes. The positioning accuracy is improved here by regions of small inclination, while a locking of the playback unit can be realized by regions without any slope of the turns 1a. An increase in the speed of movement from one position into another can be optimized by a region of steep slope. The control of the position of the playback unit can be monitored in a simple manner by means of a shaft encoder
20 switch 10 which is coupled to the rotary movement of the spindle via a drive 11.

 This construction renders possible a compact arrangement of the necessary switches, which is not possible in the case of comparatively long displacement paths of the playback unit with switches which ascertain the position of the playback unit directly.

CLAIMS:

1. A device for playing and storing several disc-shaped data carriers to be operated alternately, in particular CDs, CD-ROMs, and DVDs, with a playback unit designed for playing the data carrier and comprising a base plate (5) and a frame (6) which are coupled to one another by means of springs and/or dampers, and comprising a turntable (13) arranged on the frame (6) and designed for accommodating the data carrier and a pressure device for pressing the data carrier onto the turntable (13), while a stacking unit is provided for the intermediate storage of several data carriers, and a loading device is provided for the bidirectional transport of the data carrier between the stacking unit and the playback unit as well as for moving the data carrier into and out of the device,
- 5
- 10 characterized in that the playback unit is movable by means of a worm gear (1) and can be locked in several positions.
2. A device as claimed in claim 1, characterized in that the worm gear (1) comprises a continuous thread (1a) with several ranges having different thread slopes suitable for varying the speed of the translatory movements in dependence on the position of the playback unit at a constant worm gear rotation speed, or even stopping said movements completely.
- 15
3. A device as claimed in one of the claims 1 and 2, characterized in that a control slide (3) is displaced by the thread (1a) of the worm gear (1), which slide (3) can be locked to the playback unit, so that the control slide (3) and the playback unit are jointly moved by the thread (1a) of the worm gear (1), and the playback unit itself is retained by interlocking shapes in the device when the locking between the control slide (3) and the playback unit is lifted, while the control slide (3) still remains movable on its own and can accordingly be displaced relative to the playback unit, performing switching functions inside the playback unit.
- 20
- 25
4. A device as claimed in any one of the claims 1 to 3, with a retaining catch (4) for the control slide (3) and the playback unit which is constructed such that it alternately

inhibits and releases the movement of the control slide (3) relative to the playback unit or the movement possibility of the playback unit relative to the entire device.

5. A device as claimed in any one of the claims 1 to 4, characterized in that the
5 control slide (3) has contours which control the pressure device for the data carrier in the case of a movement relative to the playback unit and which inhibit the movement possibility between the base plate and the frame plate, which is limited by the spring-damper system only, and reduce the distance between the base plate (5) and the frame (6).
- 10 6. A device as claimed in any one of the claims 1 to 5, characterized in that the control slide (3) has a contour which controls the retaining catch (4) in the case of a movement relative to the playback unit.
7. A device as claimed in any one of the claims 1 to 6, with a switch for electronic
15 position detection which is integrated in the drive mechanism of the worm gear (1), or is controlled by the worm gear (1), or is controlled by the displacement of the control slide (3).
8. A positioning mechanism, in particular for a device for playing and storing
20 several disc-shaped data carriers for alternate operation, characterized in that the playback unit is displaceable by means of a worm gear (1) and can be locked in several positions.

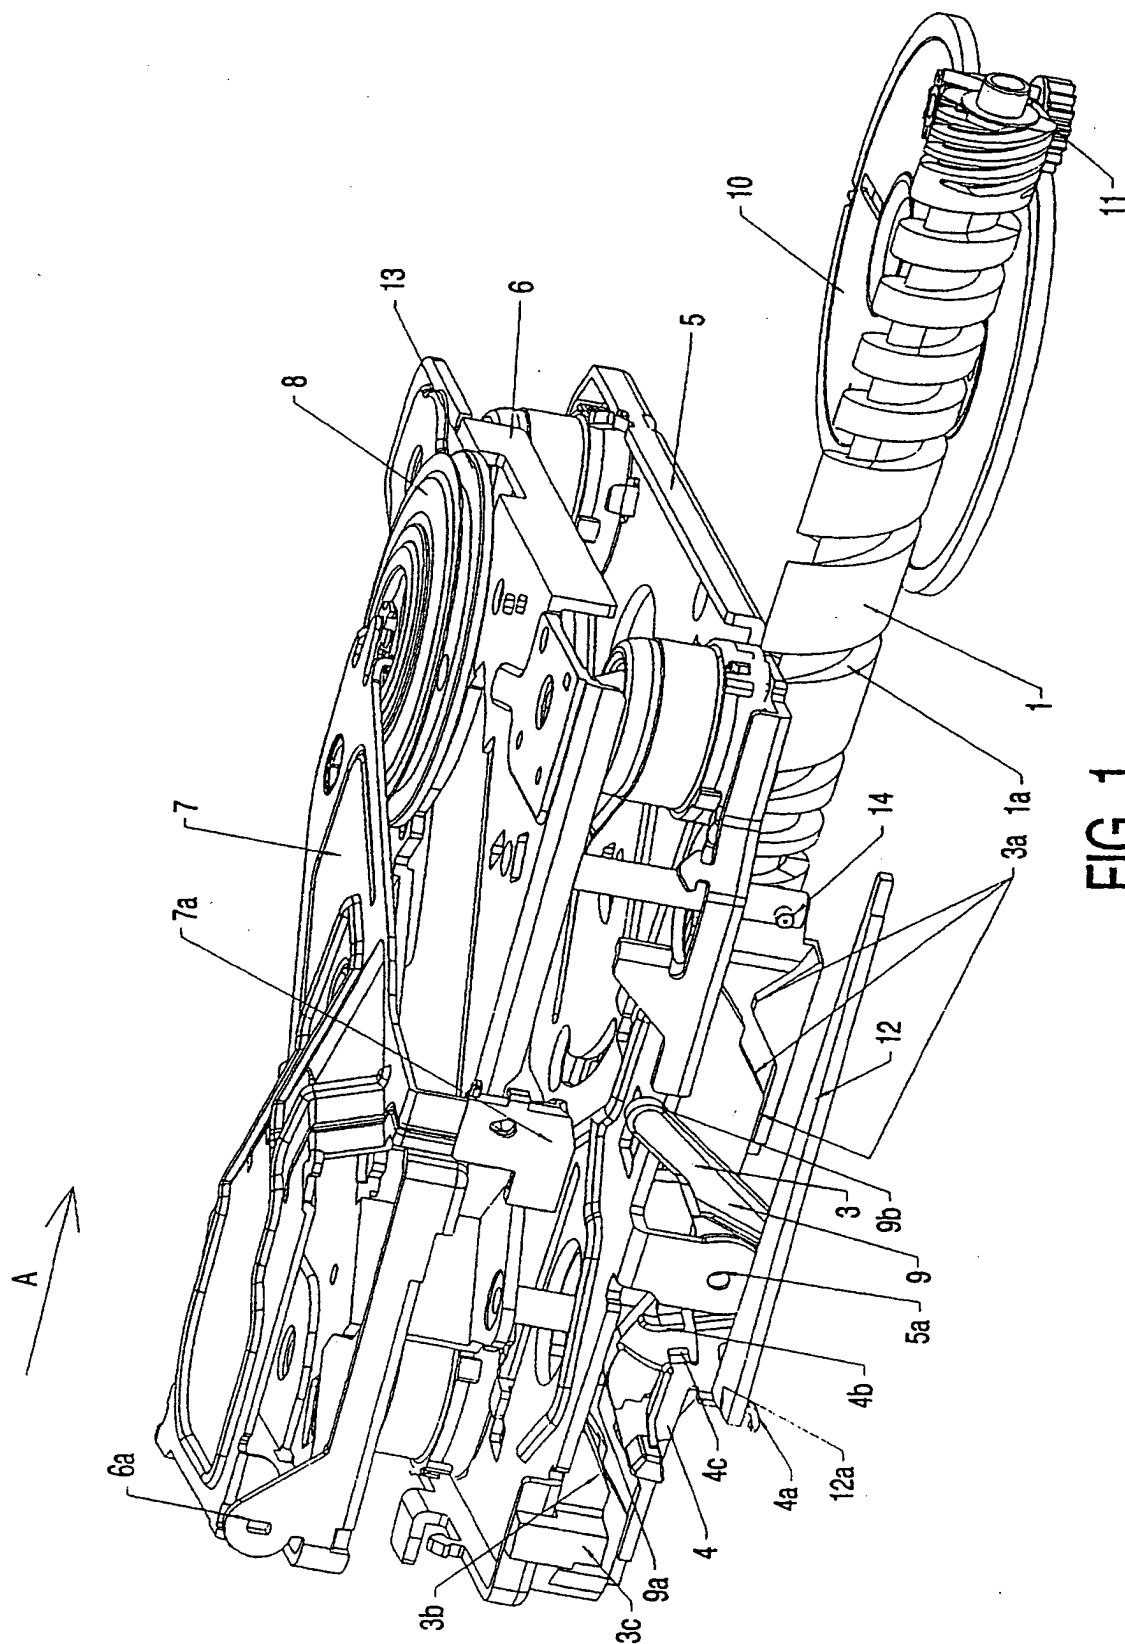
$\frac{1}{4}$ 

FIG. 1

2/4

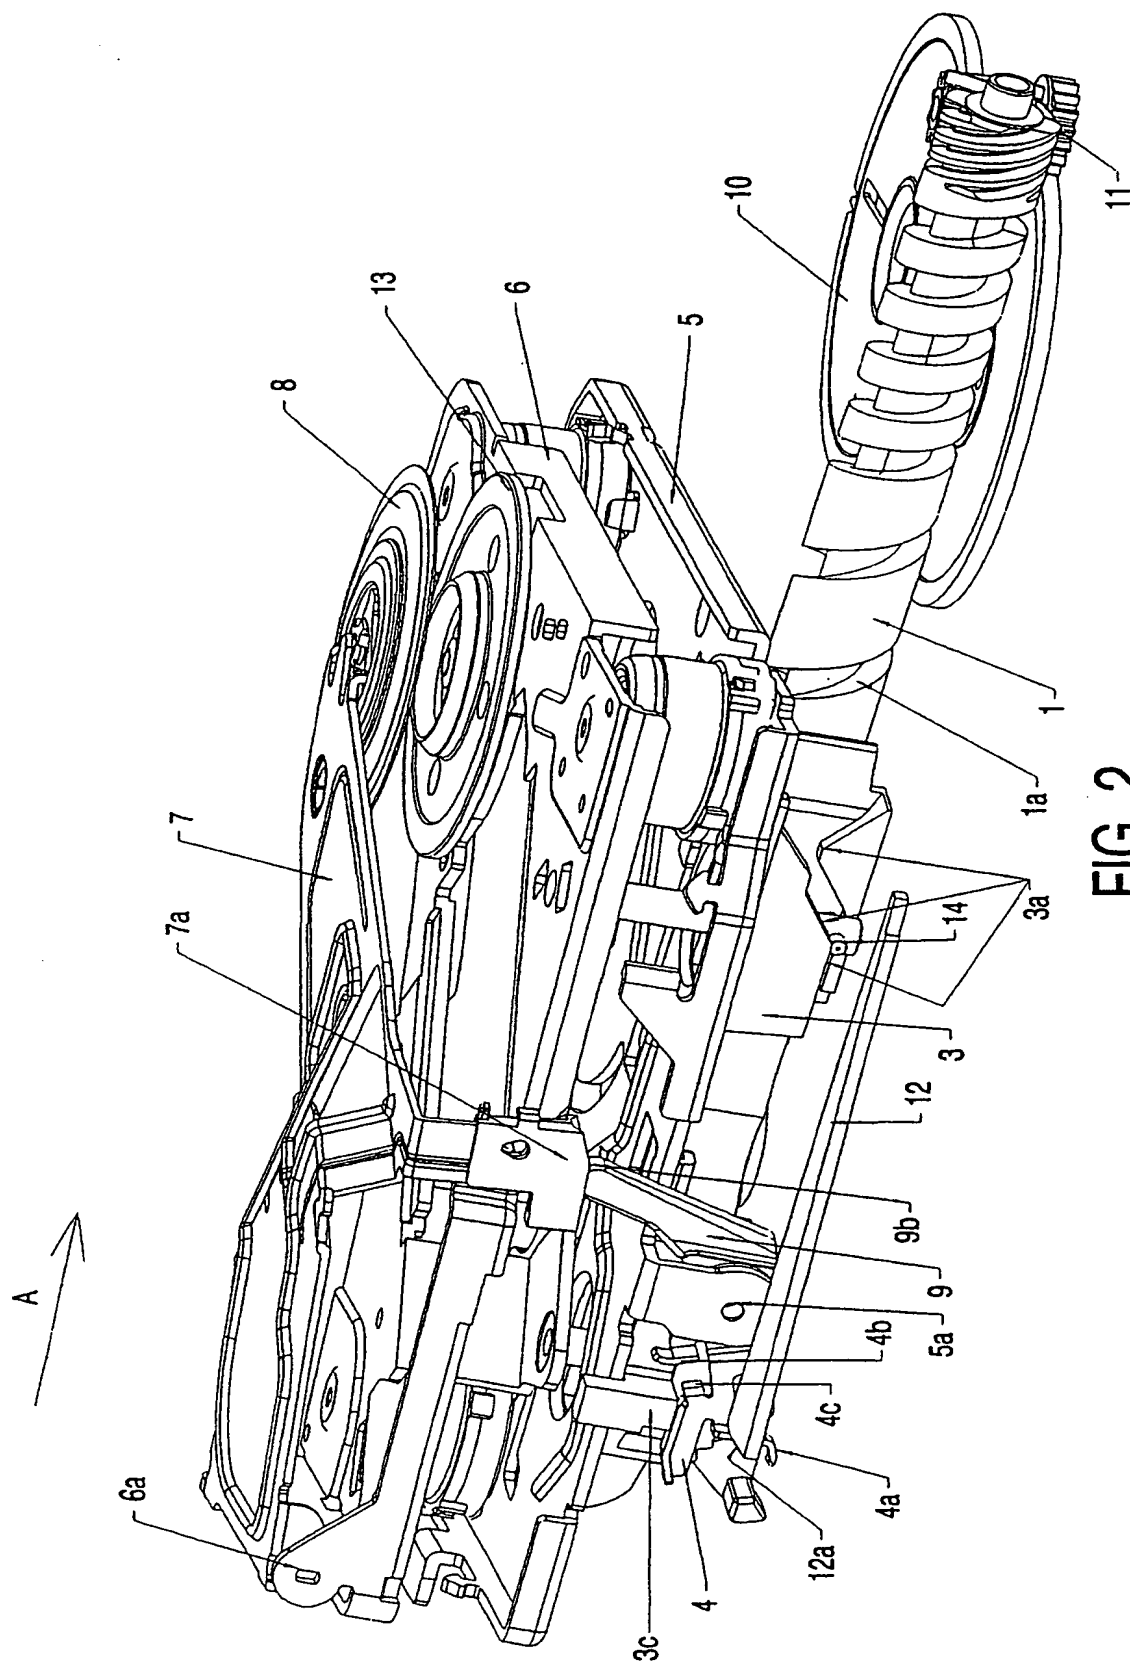


FIG. 2

3/4

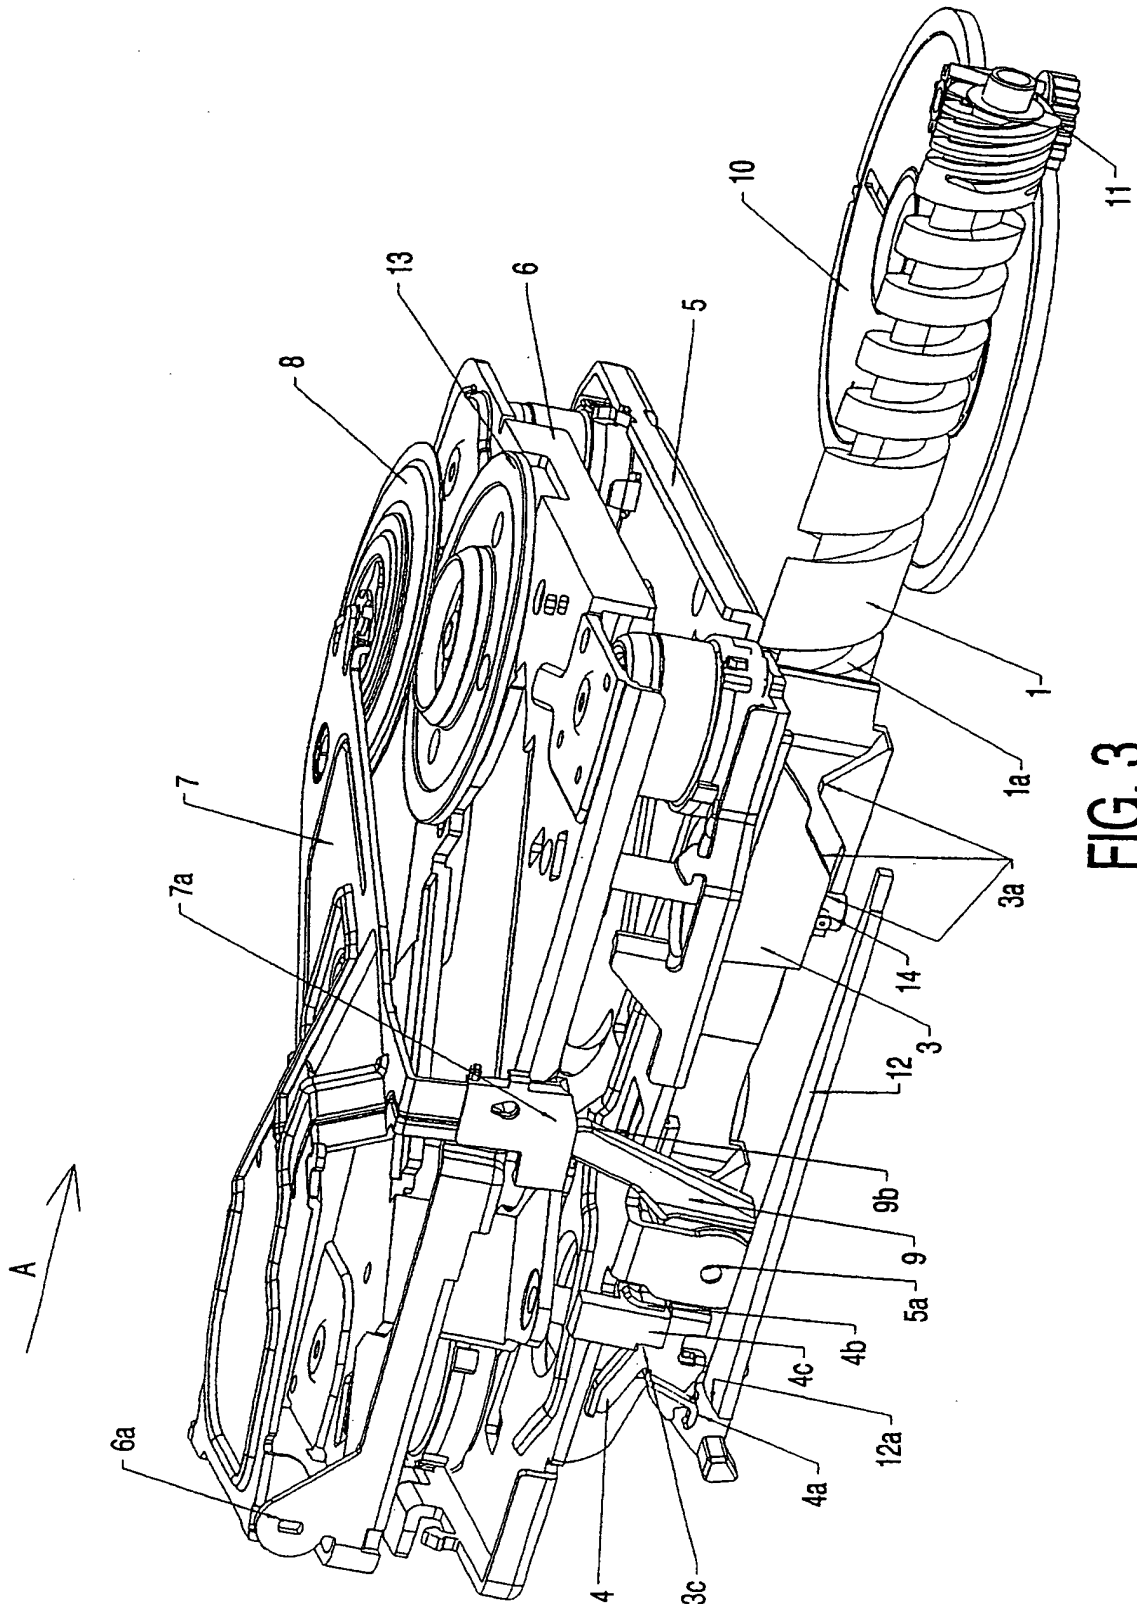


FIG. 3

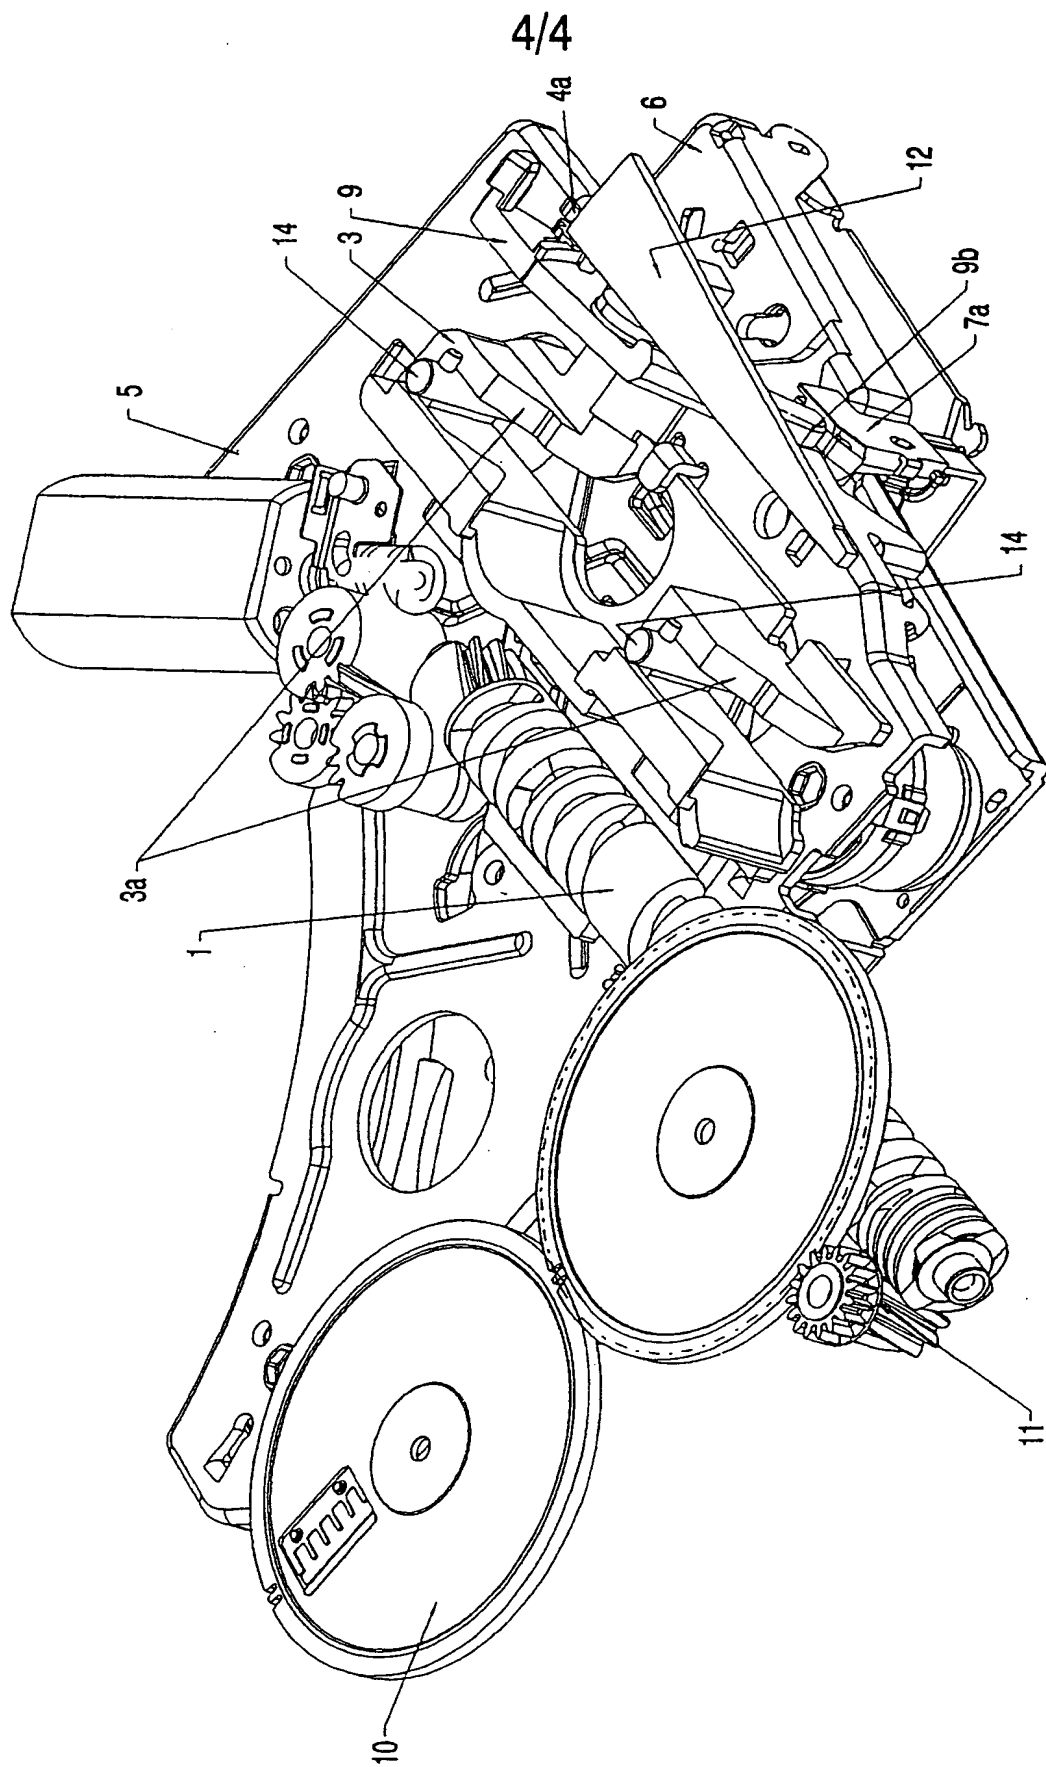


FIG. 4

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP 00/02187

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G11B17/22 G11B33/08 G11B17/30

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G11B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EP0-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 813 196 A (SONY CORP) 17 December 1997 (1997-12-17)	1,8
A	column 11, line 11 -column 16, line 8; figures 9-12	2-7
X	EP 0 273 734 A (PIONEER ELECTRONIC CORP) 6 July 1988 (1988-07-06)	1,8
	column 8, line 12 - line 19; figures 3,12	
X	US 4 797 865 A (MUTOU KOUICHI ET AL) 10 January 1989 (1989-01-10)	1,8
	column 4, line 28 -column 7, line 31; figures 2,7,8	

☐ Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

23 June 2000

Date of mailing of the international search report

30/06/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Sozzi, R

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 00/02187

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0813196 A	17-12-1997	JP 6044668 A	18-02-1994
		JP 6089494 A	29-03-1994
		DE 69322705 D	04-02-1999
		DE 69322705 T	24-06-1999
		EP 0581518 A	02-02-1994
		US 5481513 A	02-01-1996
EP 0273734 A	06-07-1988	JP 63167465 A	11-07-1988
		JP 63167466 A	11-07-1988
		JP 63167467 A	11-07-1988
		DE 3779282 A	25-06-1992
		US 4811324 A	07-03-1989
US 4797865 A	10-01-1989	NONE	

THIS PAGE BLANK (USPTO)